

BpBr Circuit® DUPLEXER

WP-641 144-174 MHz

WP-621 118-144 MHz

MIN. FREQ. SPACING: 500 KHz
POWER: TO 275 WATTS

MODEL WP-641 is a 4-cavity BpBr Circuit® duplexer designed for use with duplex systems operating in the 144-174 MHz band when the separation between the transmit and receive frequencies is 500 KHz or more. It consists of four 8" OD cavities interconnected with double shielded cable in a bandpass-reject configuration. To maintain maximum isolation, double shielded cable must be used to interconnect the duplexer to the transmitter and receiver. Numerous duplexer installation cable kits are available but must be ordered as an optional item. The Model IC-224118 cabinet is also available as an optional item.

MODEL WP-621 is identical to the above model but designed for use with duplex stations operating in the 118-144 MHz band when the Tx and Rx frequency separation is 500 KHz or more.

The BpBr Circuit®, which was developed and patented by Wacom, is a unique circuit for coupling energy into and out of a cavity filter. It provides a bandpass cavity response at the pass frequency and a deeper and wider notch at the reject frequency. BpBr Circuit® duplexers are equally suitable for use in systems with close or wide frequency separations.

WHEN ORDERING, specify model number and the exact transmit and receive frequencies to which the duplexer should be tuned. If the optional Type N connectors are preferred (same price), so indicate by adding "with Type N connectors" after the model number.

BpBr Circuit® is a Registered Trademark of Wacom Products, Inc.





Model WP-641



Optional Model IC-224118
Indoor Cabinet

TYPICAL DUPLEX RESPONSE CURVES

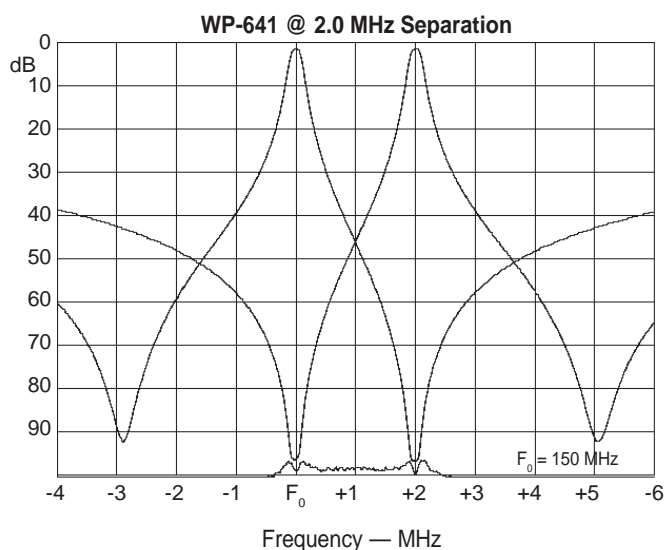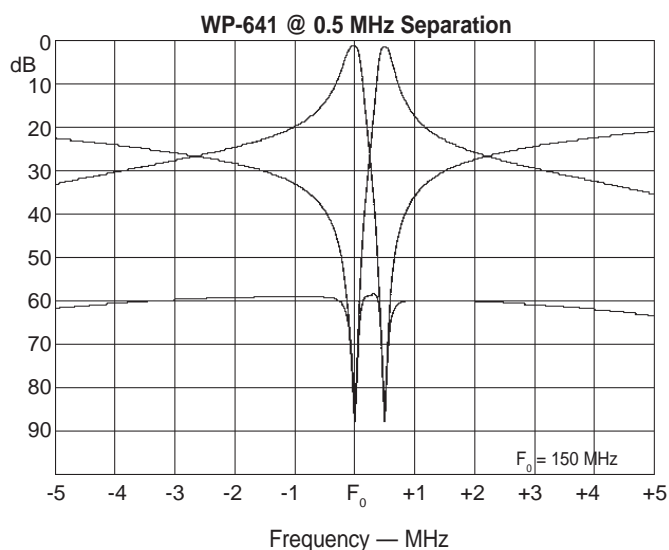

ELECTRICAL DATA

	Model WP-621	Model WP-641
Tuning Range		
A Range	118-136 MHz	144-174 MHz
B Range	130-144 MHz	
Minimum Frequency Separation	0.5 MHz or more	0.5 MHz or more
Maximum Power Input (continuous duty)	275 watts	275 watts
Insertion Loss (Tx and Rx to Antenna)		
at 0.5 MHz separation	1.5 dB	1.5 dB
at 2.0 MHz separation	1.5 dB	1.5 dB
Attenuation at Tx Freq. and Rx Freq.		
at 0.5 MHz separation	85 dB	85 dB
at 2.0 MHz separation	95 dB	95 dB
Isolation (midway between channels)		
at 0.5 MHz or more separation	55 dB	55 dB
at 2.0 MHz or more separation	90 dB	90 dB
Maximum VSWR (Ref. 50 ohms)	1.3 to 1	1.3 to 1
Temperature Range	-30° to + 60°C	-30° to + 60°C
Number of Cavity Filters	4	4

MECHANICAL DATA

Dimensions:		
Individual Cavity (not incl. tuning rod)	8" OD x 29"	8" OD x 25"
Duplexer (D x W x H) with tuning rods fully extended	17" x 19" x 36"	17" x 19" x 31"
Connector Terminations (Tx, Rx, Ant.)	UHF female (Type N optional)	UHF female (Type N optional)
Finish	Black Enamel	Black Enamel
Net Weight	44 lbs.	42 lbs.
Shipping Weight	57 lbs.	55 lbs.
Optional Cabinet	IC-224118	IC-224118
Dimensions, cabinet (D x W x H)	18 1/2" x 22 1/2" x 41"	18 1/2" x 22 1/2" x 41"
Shipping Weight (Cabinet and Duplexer)	162 lbs.	160 lbs.